
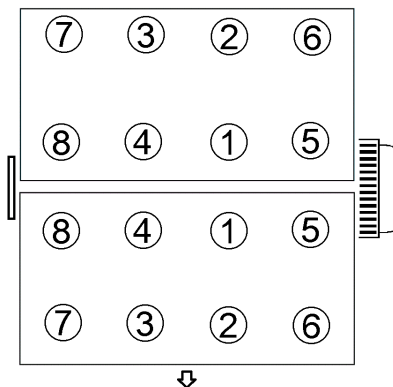


**Anziehvorschrift Zylinderkopf****Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****586.280**passend für / suitable for  
adaptable à / adaptable a**Chrysler / Dodge / Fiat /  
Jeep****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo949.390  
M 12x1,5x128Anziehen/  
Tightening/  
Serrage/  
Apriete

- ⊙ 30 Nm
- ⊙ 45 Nm
- 75°
- 50°
- loosen 360°
- 30 Nm
- 45 Nm
- 75°
- 50°

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Ø: 96 mm; ÷: 0,45 mm

Mot.: ERB

3,6 Ltr. V6

200, 300C, Grand Voyager, Challenger, Charger

Durango, Journey, Freemont,

Grand Cherokee, Wrangler

mounting position: right

**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

[service@elring.de](mailto:service@elring.de)

24/10/10

**\*586.280\***