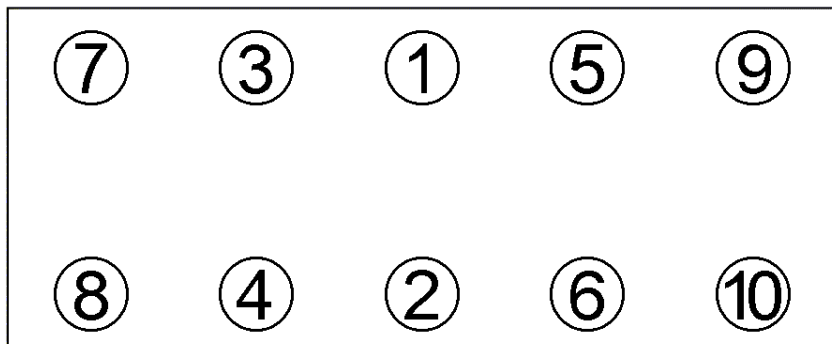


Anziehvorschrift Zylinderkopf**Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****333.470**passend für / suitable for
adaptable à / adaptable a**Mitsubishi****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo

709.190

M 12x1,25x104

Anziehen/
Tightening/
Serrage/
Apriete

- 04/1992

ZKS 709.190

M12x1,25x104

- 30 - 40 Nm
- 60 - 70 Nm
- 90 - 100 Nm

05/1992-

ZKS 709.240

M11x1,25x118

- 80 Nm
- 20 Nm
- 90°
- 90°

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 88mm; ÷: 1,3mm

Mot: 4G64, G64B, G4CS

2,4 ltr.

80-91 kW (109-124 PS)

Galant III, L300, Pajero II, Sapporo III

H-1, H100, Starex

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/01/22

333.470