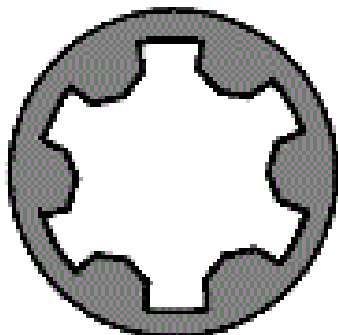
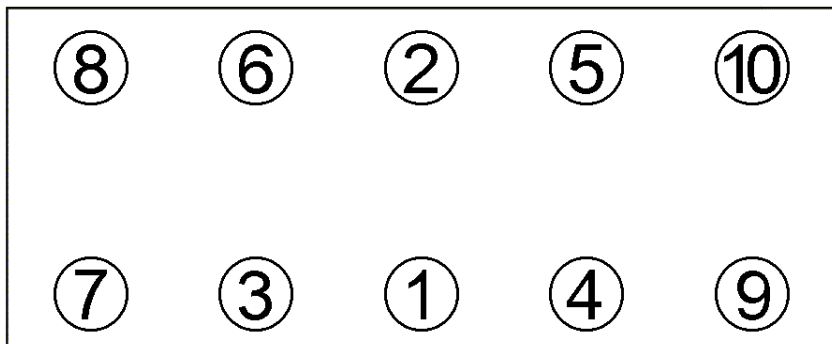


**Anziehvorschrift Zylinderkopf****Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****626.727**passend für / suitable for  
adaptable à / adaptable a**Fiat/Lancia/Alfa Romeo****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo

152.080

M 10x1,25x254

Anziehen/  
Tightening/  
Serrage/  
Apriete

- 20 Nm
- 40 Nm
- 90°
- 90°
- 90°

**Zeichenerklärung / Explanations / Explication / Explicacion**

	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

0,49 mm ÷

Barchetta, N. Punto, Stilo 1,8 Ltr.

Mot. 188.A6.000, 192.A4.000

Lybra 1,8 Ltr.

Alfa 147, 156, 166 1,6-2,0 Ltr.

Mot. AR 32104, AR 37203, AR 32205, AR 36301

**Elring-Serviceteam**

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/01/22

**\*626.727\***