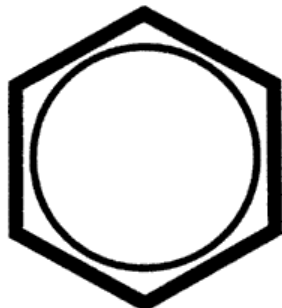
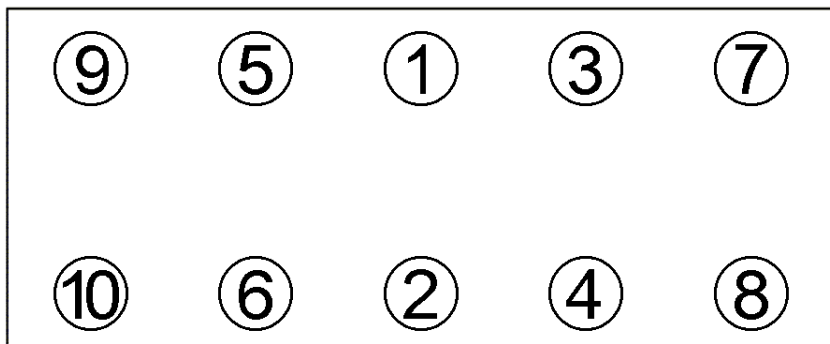


Anziehvorschrift Zylinderkopf**Tightening Instructions for Cylinder Head****Instructions de serrage pour culasse****Prescripciones de apriete para culatas****471.740**passend für / suitable for
adaptable à / adaptable a**Chevrolet / Daewoo****Das Original**Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo

356.390

M 10x1,25x166

Anziehen/
Tightening/
Serrage/
Apriete

- ⊙ Pos. 1-10: 25 Nm
- Pos. 1-10: 70°
- Pos. 1-10: 70°
- Pos. 1-10: 50°

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf-schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
*	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 80 mm; ÷: 0,55 mm

Mot: F14D3, F16D3

1.4 ltr-1.6 ltr

Chevrolet Aveo, Cruze, Kalos, Lacetti, Nubira

Daewoo Kalos, Lacetti, Nubira

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

24/10/10

471.740